
StripePy Documentation

Andrea Raffo

Jul 09, 2025

INSTALLATION

1	Documentation formats	2
2	Installation	3
3	Quickstart	5
4	Downloading sample datasets	7
5	Detect architectural stripes	9
6	Fetch architectural stripes	13
7	Visualize architectural stripes	16
8	Generating plots	18
9	CLI Reference	19
10	Python API Reference	25
11	Telemetry	31
	Python Module Index	34
	Index	35

StripePy is a CLI application written in Python that recognizes architectural stripes found in the interaction matrix files generated by Chromosome Conformation Capture experiments, such as Hi-C and Micro-C.

DOCUMENTATION FORMATS

You are reading the PDF version of the documentation.

The live HTML version of the documentation is available at <https://stripepy.readthedocs.io/en/v1.1.1/>.

Installation

StripePy can be installed using pip or conda with e.g., `pip install 'stripepy-hic[all]'`. Refer to *Installation* for more details.

How to cite this project?

Please use the following BibTeX template to cite StripePy in scientific discourse:

```
@article{stripepy,  
  author = {Raffo, Andrea and Rossini, Roberto and Paulsen, Jonas},  
  title = {{StripePy: fast and robust characterization of architectural stripes}},  
  journal = {Bioinformatics},  
  volume = {41},  
  number = {6},  
  pages = {btaf351},  
  year = {2025},  
  month = {06},  
  issn = {1367-4811},  
  doi = {10.1093/bioinformatics/btaf351},  
  url = {https://doi.org/10.1093/bioinformatics/btaf351},  
  eprint = {https://academic.oup.com/bioinformatics/article-pdf/41/6/btaf351/63484367/  
->btaf351.pdf},  
}
```

INSTALLATION

StripePy can be installed in various ways.

2.1 Installing with pip

```
pip install 'stripepy-hic[all]'
```

2.2 Installing with conda

```
conda create -n stripepy -c conda-forge -c bioconda stripepy-hic
```

2.3 Installing from source

Installing from source requires git to be available on the host.

2.3.1 Installing the latest version from the main branch

```
pip install 'stripepy-hic[all] @ git+https://github.com/paulsengroup/StripePy.git@main  
↪'
```

2.3.2 Installing version corresponding to a git tag

```
pip install 'stripepy-hic[all] @ git+https://github.com/paulsengroup/StripePy.git@v1.  
↪1.1'
```

2.3.3 Installing from a release archive

```
pip install 'stripepy-hic[all] @ https://pypi.python.org/packages/source/s/stripepy_  
↪hic/stripepy_hic-1.1.1.tar.gz'
```

2.4 Containers (Docker or Singularity/Apptainer)

First, ensure you have followed the instructions on how to install Docker or Singularity/Apptainer on your OS.

The following instructions assume you have root/admin permissions.

- Linux
- macOS
- Windows

On some Linux distributions, simply installing Docker is not enough. You also need to start (and optionally enable) the appropriate service(s). This is usually done with one of the following:

```
sudo systemctl start docker
sudo systemctl start docker.service
```

Refer to [Docker](#) or your OS/distribution documentation for more details.

2.5 Pulling stripepy Docker image

stripepy Docker images are available on [GHCR.io](#) and [DockerHub](#).

Downloading and running the latest stable release can be done as follows:

```
# Using Docker, may require sudo
user@dev:/tmp$ docker run ghcr.io/paulsengroup/stripepy:1.1.1 --help

# Using Singularity/Apptainer
user@dev:/tmp$ singularity run ghcr.io/paulsengroup/stripepy:1.1.1 --help

usage: stripepy [-h] [-v] {call,download,plot,view} ...

stripepy is designed to recognize linear patterns in contact maps (.hic, .mcool, .
↪cool) through the geometric reasoning, including topological persistence and quasi-
↪interpolation.

options:
  -h, --help            show this help message and exit
  -v, --version         show program's version number and exit

subcommands:
  {call,download,plot,view}
      call              List of available subcommands:
                        stripepy works in four consecutive steps:
                        • Step 1: Pre-processing
                        • Step 2: Recognition of loci of interest (also called 'seeds
↪')
                        • Step 3: Shape analysis (i.e., width and height estimation)
                        • Step 4: Signal analysis
      download          Helper command to simplify downloading datasets that can be
↪used to test StripePy.
      plot              Generate various static plots useful to visually inspect the
↪output produced by stripepy call.
      view              Fetch stripes from the HDF5 file produced by stripepy call.
```

The above will print stripepy's help message, and is equivalent to running `stripepy --help` from the command line (assuming stripepy is available on your machine).

QUICKSTART

StripePy is organized into a few subcommands:

- *stripepy download*: download a minified sample dataset suitable to quickly test StripePy.
- *stripepy call*: run the stripe detection algorithm and store the identified stripes in a `.hdf5` file.
- *stripepy view*: take the `result.hdf5` file generated by *stripepy call* and extract stripes in BEDPE format.
- *stripepy plot*: generate various kinds of plots to inspect the stripes identified by *stripepy call*.

3.1 Walkthrough

The following is a synthetic example of a typical run of StripePy. The steps outlined in this section assume that StripePy is running on a UNIX system. Some commands may need a bit of tweaking to run on Windows.

3.1.1 1) Download a sample dataset (optional)

If you need to download the example matrix used here, you can do so by running:

```
user@dev:/tmp$ stripepy download --name 4DNFI9GMP2J8
```

Feel free to use your own interaction matrix instead of `4DNFI9GMP2J8.mcool`. Please make sure the matrix is in `.cool`, `.mcool`, or `.hic` format.

A more extended description of the subcommand *stripepy download* is found in *Downloading sample datasets*.

3.1.2 2) Detect architectural stripes

The *stripepy call* subcommand is the core of the analysis, designed to identify architectural stripes within contact maps. This process can be quite time-consuming, especially when working with large files.

The path to your contact map file and the desired resolution are required to run the analysis. For instance, to analyse the `4DNFI9GMP2J8.mcool` file at a 10,000 bp resolution, you would use:

```
user@dev:/tmp$ stripepy call 4DNFI9GMP2J8.mcool 10000
```

The command will output a single HDF5 file (e.g., `4DNFI9GMP2J8.10000.hdf5`).

Additional information is provided in *Detect architectural stripes*.

3.1.3 3) Fetch stripes in BEDPE format

Stripe coordinates can be fetched from the `.hdf5` file using *stripepy view*, as in

```
user@dev:/tmp$ stripepy view 4DNFI9GMP2J8.10000.hdf5 > stripes.bedpe
```

Further details can be found in *Fetch architectural stripes*.

3.1.4 4) Quickly visualize architectural stripes

It is often a good idea to visually inspect at least some of the stripes to make sure that the used parameters are suitable for the dataset that was given to *stripepy call*.

We provide a Jupyter notebook `visualize_stripes_with_highlass.ipynb` to facilitate this visual inspection. The notebook expects the input file to be in `.mcool` format.

More info available at [Visualize architectural stripes](#).


3.2 Generating plots

StripePy comes with a `plot` subcommand that can be used to visualize architectural stripes overlaid on top of the Hi-C matrix. *stripepy plot* can also generate several graphs showing the general properties of the called stripes, see [Generating plots](#) for a complete overview.

For instance, running

```
user@dev:/tmp$ stripepy plot cm 4DNFI9GMP2J8.mcool 10000 /tmp/matrix_with_stripes.png
↪ --stripepy-hdf5 4DNFI9GMP2J8.10000.hdf5 --highlight-stripes
```

will generate the following plot

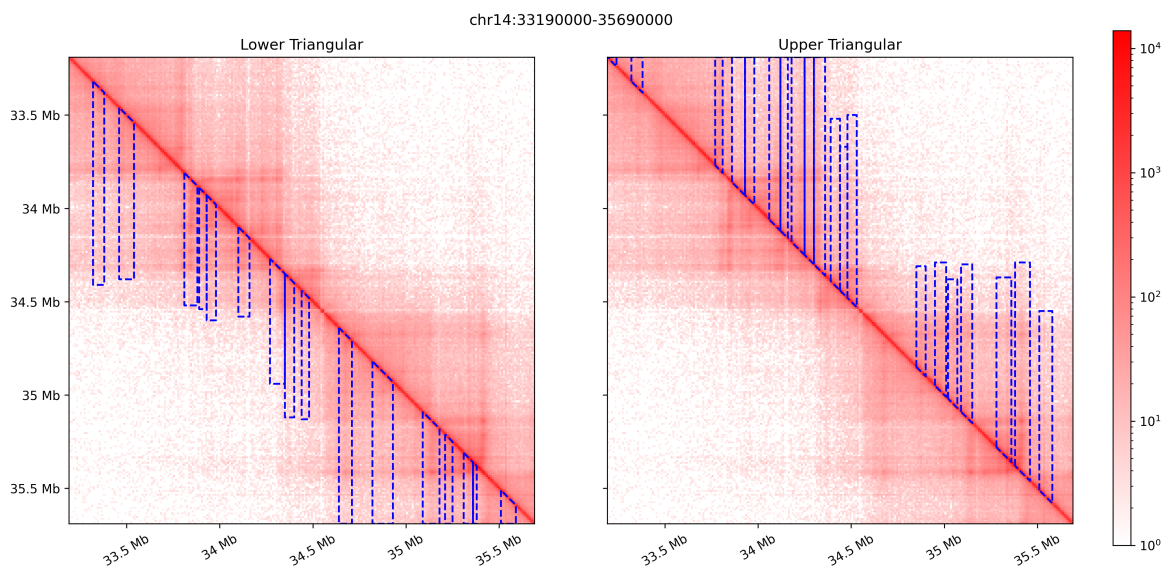

DOWNLOADING SAMPLE DATASETS

stripepy download is used to download sample datasets suitable to quickly test StripePy. It provides various options to specify which datasets to download, where to store them, and how to handle existing files.

4.1 Listing available datasets

Before downloading, you might want to see the available datasets. The `--list-only` options prints a nested JSON object without initiating any downloads.

The outermost JSON object has dataset names as keys. Each value is an object containing metadata like URL, assembly, and file format.

```
user@dev:/tmp$ stripepy download --list-only
{
  "4DNFI3RFZLZ5": {
    "url": "https://zenodo.org/records/15301784/files/4DNFI3RFZLZ5.stripepy.mcool?
↪download=1",
    "md5": "f6e060211c95dd5fbf6e708c637d1c1c",
    "assembly": "mm10",
    "format": "mcool",
    "size_mb": 83.85
  },
  ...
  "ENCF993FGR": {
    "url": "https://zenodo.org/records/15301784/files/ENCF993FGR.stripepy.hic?
↪download=1",
    "md5": "3bcb8c8c5aac237f26f994e0f5e983d7",
    "assembly": "hg38",
    "format": "hic",
    "size_mb": 185.29
  }
}
```

4.2 Basic download operations

stripepy download can be used to download a dataset by specifying its name.

For example, to download the dataset named 4DNFI9GMP2J8:

```
# This may take a while on slow internet connections
user@dev:/tmp$ stripepy download --name 4DNFI9GMP2J8

2025-01-14 12:46:01.304277 [info      ] downloading dataset "4DNFI9GMP2J8"
↪(assembly=hg38)...
```

(continues on next page)

(continued from previous page)

```

2025-01-14 12:46:23.900411 [info      ] DONE! Downloading dataset "4DNFI9GMP2J8" took
↳22.596s.
2025-01-14 12:46:23.901141 [info      ] computing MD5 digest for file "/tmp/
↳4DNFI9GMP2J8.dvizz7v1"...
2025-01-14 12:46:24.050566 [info      ] MD5 checksum match!
2025-01-14 12:46:24.050695 [info      ] successfully downloaded dataset "https://
↳zenodo.org/records/14643417/files/4DNFI9GMP2J8.stripepy.mcool?download=1" to file
↳"4DNFI9GMP2J8.mcool"
2025-01-14 12:46:24.050752 [info      ] file size: 106.84MB. Elapsed time: 22.979s

```

Note that, if the dataset already exists, it will be overwritten if and only if the `--force` flag is specified; otherwise, the command will fail to prevent accidental data loss.

If no name is provided, the tool will default to selecting a random dataset. You can refine this random selection by specifying parameters like the maximum allowed size:

```

# This may take a while on slow internet connections
user@dev:/tmp$ stripepy download --max-size 100

2025-07-02 12:29:43.095292 [info      ] downloading dataset "4DNFI3RFZLZ5"
↳(assembly=mm10)...
2025-07-02 12:30:31.664521 [info      ] DONE! Downloading dataset "4DNFI3RFZLZ5" took
↳48.569s.
2025-07-02 12:30:31.665930 [info      ] computing MD5 digest for file "/tmp/
↳4DNFI3RFZLZ5._3a7e1bs"...
2025-07-02 12:30:31.850671 [info      ] MD5 checksum match!
2025-07-02 12:30:31.851358 [info      ] successfully downloaded dataset "https://
↳zenodo.org/records/15301784/files/4DNFI3RFZLZ5.stripepy.mcool?download=1" to file
↳"4DNFI3RFZLZ5.mcool"
2025-07-02 12:30:31.851449 [info      ] file size: 83.86 MiB. Elapsed time: 49.160s

```

The `--assembly` option provides a mechanism to restrict downloads to datasets specifically associated with a given reference genome assembly. Currently, the supported options for this parameter are `hg38` (human) and `mm10` (mouse).

Additionally, for internal testing or specific development purposes, the `--include-private` flag allows the inclusion of datasets typically for internal testing.

4.3 Downloading test datasets

The `stripepy download` command also provides dedicated functionalities for acquiring specific test datasets used in unit and end-to-end testing.

The `--unit-test` option allows the download of datasets specifically required by the unit tests. When this option is invoked, the downloaded files are automatically stored within the `test/data/` directory, and any existing files at that location will be overwritten. It is important to note that when `--unit-test` is specified, all other command-line options are ignored, streamlining the test data acquisition process.

Similarly, the `--end2end-test` option allows the download of datasets necessary for end-to-end tests. Consistent with the unit test behavior, these files are also stored in the `test/data/` directory, existing files are overwritten, and all other command-line options are disregarded when this flag is active.

DETECT ARCHITECTURAL STRIPES

The *stripepy call* command serves as the main component within StripePy, and may take several minutes to complete when processing large files.

5.1 Positional arguments

The command mandates two positional arguments:

- `contact_map`, which specifies the path to the input Hi-C file (in `.cool`, `.mcool`, or `.hic` format).
- `resolution`, which represents the resolution (in base pairs) at which the analysis should be run.

For instance, to run the command on a file named `4DNFI9GMP2J8.mcool` at a resolution of 10,000 bp, you would use the following command:

```
user@dev:/tmp$ stripepy call 4DNFI9GMP2J8.mcool 10000
```

Running the above command produces a similar output, here truncated for the sake of brevity:

```
2025-04-15 08:13:24.639742 [info      ] running StripePy v1.0.0
2025-04-15 08:13:24.637358 [info      ] [main      ] CONFIG:
{
  "constrain_heights": false,
  "contact_map": "4DNFI9GMP2J8.mcool",
  "force": false,
  "genomic_belt": 5000000,
  "glob_pers_min": 0.04,
  "loc_pers_min": 0.33,
  "loc_trend_min": 0.25,
  "log_file": null,
  "max_width": 100000,
  "min_chrom_size": 2000000,
  "normalization": null,
  "nproc": 1,
  "output_file": "/tmp/4DNFI9GMP2J8.10000.hdf5",
  "plot_dir": null,
  "resolution": 10000,
  "roi": null,
  "verbosity": "info"
}
2025-04-15 08:13:24.637440 [info      ] [main      ] validating file "4DNFI9GMP2J8.
↪mcool" (10000bp)
2025-04-15 08:13:24.650236 [info      ] [main      ] file "4DNFI9GMP2J8.mcool"
↪successfully validated
2025-04-15 08:13:24.650445 [info      ] [IO        ] initializing result file "/tmp/
↪4DNFI9GMP2J8.10000.hdf5"
```

(continues on next page)

(continued from previous page)

```

2025-04-15 08:13:24.672613 [info      ] [chr1 ] [main   ] begin processing
2025-04-15 08:13:24.672729 [info      ] [chr1 ] [IO     ] fetching interactions_
↳using normalization=NONE
2025-04-15 08:13:25.483686 [info      ] [chr1 ] [IO     ] fetched 6823257 pixels in_
↳810.948ms
2025-04-15 08:13:25.483913 [info      ] [chr1 ] [step 1 ] data pre-processing
2025-04-15 08:13:25.483995 [info      ] [chr1 ] [step 1.1 ] focusing on a_
↳neighborhood of the main diagonal
2025-04-15 08:13:25.535171 [info      ] [chr1 ] [step 1.1 ] removed 0.00% of the non-
↳zero entries (0/6823257)
2025-04-15 08:13:25.535378 [info      ] [chr1 ] [step 1.2 ] applying log-
↳transformation
2025-04-15 08:13:25.549232 [info      ] [chr1 ] [step 1.3 ] projecting interactions_
↳onto [1, 0]
2025-04-15 08:13:25.553946 [info      ] [chr1 ] [step 1   ] preprocessing took 69.
↳937ms
2025-04-15 08:13:25.558918 [info      ] [chr1 ] [step 2   ] topological data analysis
2025-04-15 08:13:25.559059 [info      ] [chr1 ] [step 2.1.0] [LT] computing global 1D_
↳pseudo-distribution
2025-04-15 08:13:25.583652 [info      ] [chr1 ] [step 2.2.0] [LT] detection of_
↳persistent maxima and corresponding minima
2025-04-15 08:13:25.583770 [info      ] [chr1 ] [step 2.2.1] [LT] computing persistence
2025-04-15 08:13:25.625730 [info      ] [chr1 ] [step 2.2.2] [LT] filtering low_
↳persistence values
2025-04-15 08:13:25.626417 [info      ] [chr1 ] [step 2.2.3] [LT] removing seeds_
↳overlapping sparse regions
2025-04-15 08:13:25.686625 [info      ] [chr1 ] [step 2.2.3] [LT] number of seed sites_
↳reduced from 1807 to 1748
2025-04-15 08:13:25.686795 [info      ] [chr1 ] [step 2.3.1] [LT] generating the list_
↳of candidate stripes
2025-04-15 08:13:25.687662 [info      ] [chr1 ] [step 2.3.1] [LT] identified 1748_
↳candidate stripes
2025-04-15 08:13:25.687864 [info      ] [chr1 ] [step 2.1.0] [UT] computing global 1D_
↳pseudo-distribution
2025-04-15 08:13:25.713048 [info      ] [chr1 ] [step 2.2.0] [UT] detection of_
↳persistent maxima and corresponding minima
2025-04-15 08:13:25.713154 [info      ] [chr1 ] [step 2.2.1] [UT] computing persistence
2025-04-15 08:13:25.753436 [info      ] [chr1 ] [step 2.2.2] [UT] filtering low_
↳persistence values
2025-04-15 08:13:25.753932 [info      ] [chr1 ] [step 2.2.3] [UT] removing seeds_
↳overlapping sparse regions
2025-04-15 08:13:25.813509 [info      ] [chr1 ] [step 2.2.3] [UT] number of seed sites_
↳reduced from 1698 to 1647
2025-04-15 08:13:25.813687 [info      ] [chr1 ] [step 2.3.1] [UT] generating the list_
↳of candidate stripes
...
2025-04-15 08:14:59.123408 [info      ] [IO     ] finalizing file "/tmp/
↳4DNFI9GMP2J8.10000.hdf5"
2025-04-15 08:14:59.127303 [info      ] [main   ] DONE!
2025-04-15 08:14:59.127399 [info      ] [main   ] processed 24 chromosomes in 1m:34.
↳490s

```

Upon successful completion, the above command will generate a single HDF5 file named `4DNFI9GMP2J8.10000.hdf5` in the current working directory. Note that, if the HDF5 already exists, it will be overwritten if and only if the `--force` flag is specified; otherwise, the command will fail to prevent accidental data loss.

5.2 Output and logging configuration

By default, the output HDF5 file is named after the input matrix file with the resolution appended, for example, `4DNFI9GMP2J8.100000.hdf5`. However, you have the flexibility to specify an alternative output path and filename for this HDF5 file using the `--output-file` option.

Furthermore, it is possible to save the complete log of a run to a file by specifying the path where to store the log file through the `--log-file` CLI option.

5.3 Stripe detection parameters

Beyond these arguments, *stripepy call* comes with a suite of optional parameters for fine-tuning the stripe detection process. For a full understanding of their meaning, the user is referred to our [paper](#).

5.3.1 Step 1: pre-processing

You can apply a specific `--normalization` method when fetching the contact map data from the input file; by default, no normalization is applied. As found in our experiments, our algorithm performs optimally when no prior balancing is applied (see the [Supplementary Information](#) from our paper).

The `--genomic-belt` option defines a radial band around the main diagonal of the contact map, specified in base pairs, to which the stripe search is confined; its default value is 5 Mbp.

5.3.2 Step 2: line detection

The `--glob-pers-min` option sets a critical threshold value between 0 and 1 (defaulting to 0.04). This threshold is instrumental in filtering persistence maxima points for the global pseudo-distribution, which are crucial for identifying initial candidate stripe locations, frequently referred to as “seeds”.

5.3.3 Step 3: shape analysis

The maximum permissible stripe width can be explicitly controlled using the `--max-width` option, which is specified in base pairs and defaults to 100,000 bp.

The height of a stripe can be constrained by studying a local pseudo-distribution via two alternative criteria:

- One criterion involves direct thresholding the local pseudo-distribution to a minimum value, specified via the option `--loc-trend-min`, which should be set between 0 and 1 (defaulting to 0.25). A higher value for this parameter generally results in the detection of shorter stripes.
- Alternatively, the algorithm applies topological persistence to the local pseudo-distribution to identify persistent peaks. The location of the furthest identified peak is then used as a boundary for the stripe. This approach is engaged when the `--constrain-heights` flag is activated, which instructs the algorithm to utilize peaks within the local pseudo-distribution for height estimation. When `--constrain-heights` is active, the `--loc-pers-min` option acts as a threshold value between 0 and 1 (defaulting to 0.33) used to identify signal peaks within a horizontal domain when estimating the height of a stripe. If no persistent maximum other than the global maximum is found by the algorithm, the previous criterion is run.

5.3.4 Step 4: signal analysis

The `--k-neighbour` option allows you to define ‘k’ for the k-neighbours: it represents the number of bins that are considered adjacent to the stripe boundaries on both sides, with a default value of 3. It is used to compute various signal descriptors, such as the relative change parameter.

5.4 Diagnostic plots generation

The command *stripepy call* can generate several diagnostic plots that can be of help to gain more insights into the decisions made by the tool.

To generate the diagnostic plots, pass `--roi=middle` and specify the path to a folder where to store the plots using `--plot-dir`. The `--roi` option requires you to specify a criterion (`start` or `middle`) to select a representative region from each chromosome for plot generation. Concurrently, the `--plot-dir` option designates the path to a directory where these output plots will be stored. It is important to note that the `--plot-dir` option is mandatory when `--roi` is specified and is otherwise ignored. If the specified directory does not exist at the time of execution, `stripepy` will automatically create it.

5.5 Performance options

When processing larger Hi-C matrix, StripePy can take advantage of multicore processors.

The maximum number of CPU cores use by StripePy can be changed through option `--nproc` (set to 1 core by default).

Whenever possible, we recommend using 4-8 CPU cores. Using more than 8 CPU cores is unlikely to result in significantly better computational performance (that is unless your Hi-C dataset is particularly dense).

FETCH ARCHITECTURAL STRIPES

The `.hdf5` file produced by `stripepy call` contains various kinds of information, including stripe coordinates, various descriptive statistics, persistence vectors, and more.

While having access to all this information can be useful, usually we are mostly interested in the stripe coordinates, which can be fetched using `stripepy view`.

```
# Fetch the first 10 stripes in BEDPE format
user@dev:/tmp$ stripepy view 4DNFI9GMP2J8.10000.hdf5 | head

chr1 910000 960000 chr1 930000 3590000
chr1 1060000 1110000 chr1 1080000 3540000
chr1 1570000 1620000 chr1 1600000 2590000
chr1 1600000 1670000 chr1 880000 1620000
chr1 1670000 1700000 chr1 1680000 2610000
chr1 1730000 1780000 chr1 1750000 2570000
chr1 1780000 1840000 chr1 1780000 2580000
chr1 1890000 1940000 chr1 1920000 3540000
chr1 1940000 2020000 chr1 1960000 3590000
chr1 2020000 2060000 chr1 2020000 3550000

# Redirect stdout to a file
user@dev:/tmp$ stripepy view 4DNFI9GMP2J8.10000.hdf5 > stripes.bedpe

# Compress stripes on the fly before writing to a file
user@dev:/tmp$ stripepy view 4DNFI9GMP2J8.10000.hdf5 | gzip -9 > stripes.bedpe.gz
```

6.1 Output customization and filtering

When viewing the stripes, several optional parameters are available to customize the output.

The `--relative-change-threshold` option allows you to set a cutoff value (defaulting to 5.0) for filtering stripes based on their relative change. This relative change is calculated as the ratio between the average number of interactions found inside a stripe and the number of interactions in a neighborhood immediately outside of the stripe.

If you are interested in the biodescriptors associated with each individual stripe, you can pass `--with-header` and `--with-biodescriptors` when calling `stripepy view`.

This is the output generated by running `stripepy view` on the `.hdf5` generated using `stripepy call` v1.1.1. Files generated by older versions of StripePy may have different columns.

```
user@dev:/tmp$ stripepy view 4DNFI9GMP2J8.10000.hdf5 --with-biodescriptors --with-
↪header | head

chrom1      start1  end1    chrom2  start2  end2    top_persistence inner_mean  ↪
↪inner_std   outer_lsum  outer_lsize  outer_rsum  outer_rsize  min_↪
                                                                 (continues on next page)
```

(continued from previous page)

→	q1	q2	q3	max	outer_lmean	outer_rmean	outer_mean	→
→	rel_change							
chr1	910000	960000	chr1	930000	3590000	0.3984904019	0.2506571890861574	→
→	0.14123131812515843			144.79589039186396	801	192.25135582429806		→
→	8010.0	0.17139833204774585		0.22938081658911763		0.28656944403925566	0.	
→	9741568863537948			0.18076890186250183		0.24001417705904876	0.	
→	2103915394607753			19.138435760573497				
chr1	1060000	1110000	chr1	1080000	3540000	0.0826359687	0.23019685453871336	→
→	0.14481608064533394			186.18030631678906	741	179.64345985134207		→
→	7410.0	0.1539575922232785		0.21018481227951455		0.2710230083036015	0.	
→	9903418421799679			0.2512554741117261		0.24243381896267485	0.	
→	246844646537200486			744238626207448				
chr1	1570000	1620000	chr1	1600000	2590000	0.041030112800000002	0.	
→	33195798369580404			0.10697974882795283		99.02697827900961	300	85.
→	58022773213244		300	0.10509240613975727		0.2710230083036015	0.	
→	3152772184192718			0.3662448898065007		0.9887477925105556	0.	
→	3300899275966987			0.2852674257737748		0.3076786766852368	7.	
→	891124361343245							
chr1	1600000	1670000	chr1	880000	1620000	0.10798038449999997	0.	
→	34673478460468343			0.12547401272240433		79.95811315769556	225	63.
→	18147668278408		225	0.0	0.25904999836303577	0.33447322272887486		→
→	0.4155250840484962			0.9887477925105556		0.3553693918119803	0.	
→	2808065630345959			0.3180879774232881		9.0059383612837		
chr1	1670000	1700000	chr1	1680000	2610000	0.085213391100000004	0.	
→	30510000180174507			0.11602295320194354		84.13794539599031	282	71.
→	90225464650885		282	0.0	0.22938081658911763	0.304010183863723		→
→	0.3727716787770423			0.8753282776351561		0.29836150849641957	0.	
→	2549725342074782			0.2766670213519489		10.276967710447305		
chr1	1730000	1780000	chr1	1750000	2570000	0.09549401749999997	0.	
→	34157106048803376			0.12939228310023276		66.96694495052422	249	77.
→	44100032822071		249	0.06630592590798857		0.25245019336736707	0.	
→	32535592427102433			0.41427461878487365		0.9374989352738993	0.	
→	26894355401816955			0.3110080334466695		0.28997579373241955	17.	
→	792956471126924							
chr1	1780000	1840000	chr1	1780000	2580000	0.149613560200000005	0.	
→	31446872398046843			0.14174768874612398		89.65252960337472	243	73.
→	53776985594494		243	0.0	0.2202635181312671	0.28656944403925566		→
→	0.3761154144433587			0.9150948504497306		0.3689404510426943	0.	
→	3026245673084154			0.33578250917555486		6.347497148501883		
chr1	1890000	1940000	chr1	1920000	3540000	0.136435108300000005	0.	
→	27087952940479454			0.15589512088714813		98.34422915113818	489	137.
→	9512119037385		489	0.0	0.17139833204774585	0.2453610817780414		→
→	0.3592307814635864			0.989227567682685		0.20111294304936234	0.	
→	2821088177990563			0.24161088042420928		12.113961477726793		
chr1	1940000	2020000	chr1	1960000	3590000	0.058244881400000006	0.	
→	267059000791004			0.1518633129658817		138.54936114286124	492	138.
→	81994263073136		492	0.0	0.17139833204774585	0.2453610817780414		→
→	0.34858989163711346			0.9751278353396942		0.28160439256679115	0.	
→	2821543549405109			0.281879373753651		5.257700400455457		

If you are working in Python, you might want to take a look at the classes `Result` and `ResultFile`.

6.2 Coordinate transformation

The `--transform` option provides control over how stripe coordinates are presented in the output. By default, no transformation is applied. However, you can specify `transpose_to_ut` to transpose coordinates to the upper triangular part of the contact map, or `transpose_to_lt` to transpose them to the lower triangular part, which can be useful for specific downstream analyses or visualization preferences.

VISUALIZE ARCHITECTURAL STRIPES

Visually inspecting a subset of the detected stripes is highly recommended to verify that the parameters configured for *stripepy call* are well-suited to your specific dataset. To assist with this inspection, the Jupyter notebook [visualize_stripes_with_highlass.ipynb](#) is provided. This notebook is designed to work with input files in the `.mcool` format.

If your matrix is in `.hic` format you can easily convert it to `.mcool` format using `hictk` by running `hictk convert matrix.hic matrix.mcool`. HiGlass cannot visualize single-resolution Cooler files. If you are working with `.cool` files you can use `hictk` to generate `.mcool` files by running `hictk zoomify matrix.cool matrix.mcool`.

For more details, please refer to `hictk`'s documentation: hictk.readthedocs.io.

We recommend running the notebook using `JupyterLab`.

Furthermore, the notebook depends on a few Python packages that can be installed with `pip`. Please make sure that the following packages are installed in a virtual environment that is accessible from Jupyter. Refer to `IPython`'s documentation for instructions on how to add a virtual environment to Jupyter.

```
pip install 'clodius>=0.20,<1' 'hictkpy>=1,<2' 'highlass-python>=1.2,<2'
```

Next, launch `JupyterLab` and open notebook [visualize_stripes_with_highlass.ipynb](#).

```
jupyter lab
```

Before running the notebook, scroll down to the following cell


```
mcool = ensure_file_exists("CHANGEME.mcool")
bedpe = ensure_file_exists("CHANGEME.bedpe")
```

and set the `mcool` and `bedpe` variables to the path to the `.mcool` file used to call stripes and the path to the stripe coordinates extracted with *stripepy view*, respectively.

```
mcool = ensure_file_exists("4DNFI9GMP2J8.mcool")
bedpe = ensure_file_exists("stripes.bedpe")
```

Now you are ready to run all cells.

Running the last cell will display a HiGlass window embedded in the Jupyter notebook (note that the interface may take a while to load).

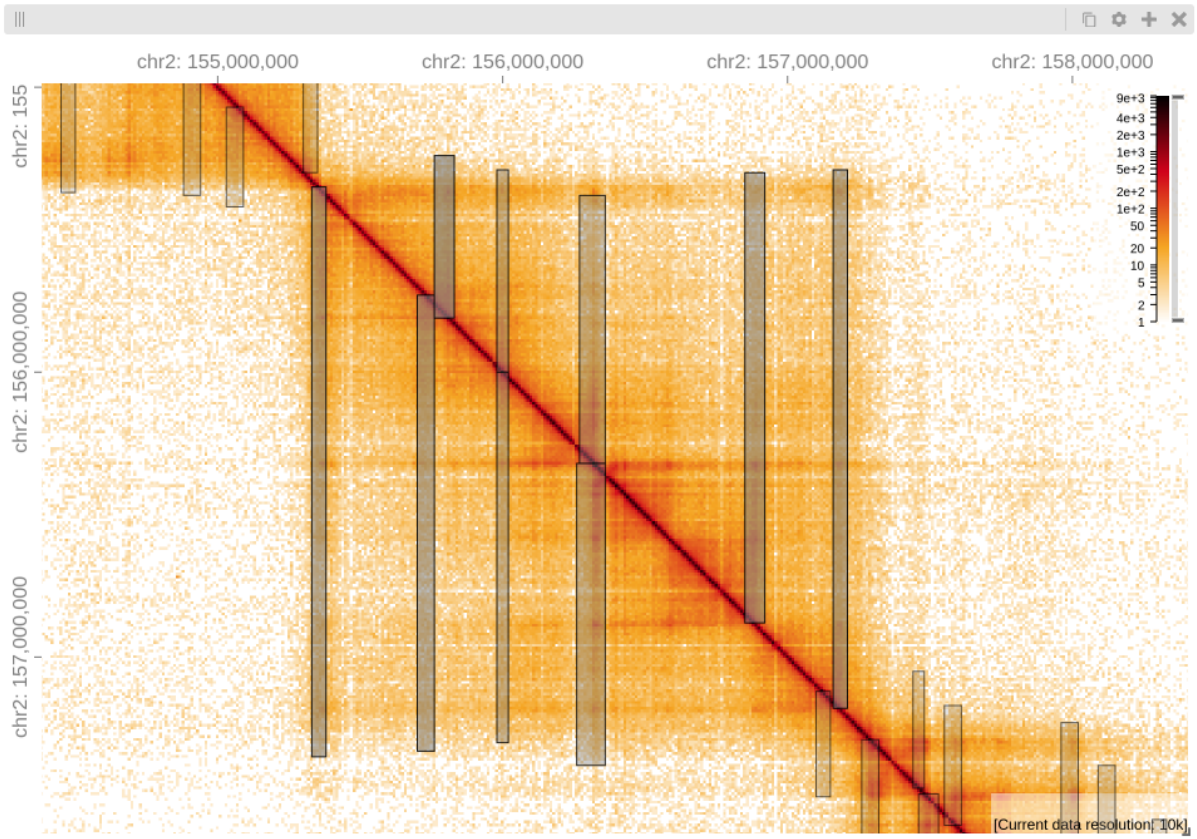

GENERATING PLOTS

StripePy comes with a `plot` subcommand that can be used to generate various kinds of plots.

`stripepy plot` supports the following subcommands:

- `contact-map (cm)`: plot stripes and other features over the Hi-C matrix
- `pseudodistribution (pd)`: plot the pseudo-distribution over the given region of interest
- `stripe-hist (hist)`: generate and plot the histograms showing the distribution of the stripe heights and widths

`stripepy cm` takes as input a Hi-C matrix in `.cool`, `.mcool`, or `.hic` format, and optionally the `.hdf5` file generated by `stripepy call` (this parameter is mandatory when highlighting stripes or stripe seeds).

`stripepy pd` and `stripepy hist` do not require the Hi-C matrix file, and require the `.hdf5` file generated by `stripepy call` instead.

All three subcommands support specifying a region of interest through the `--region` option. When the commands are run without specifying the region of interest, `stripepy cm` and `stripepy pd` will generate plots for a random 2.5 Mbp region, while `stripepy hist` will generate histograms using data from the entire genome.

Example usage:

```
# Plot the pseudo-distribution over a region of interest
stripepy plot pd 4DNFI9GMP2J8.10000.hdf5 /tmp/pseudodistribution.png --region_
↳chr2:120100000-122100000

# Plot the histograms using genome-wide data
stripepy plot hist 4DNFI9GMP2J8.10000.hdf5 /tmp/stripe_hist_gw.png

# Plot the Hi-C matrix
stripepy plot cm 4DNFI9GMP2J8.mcool 10000 /tmp/matrix.png

# Plot the Hi-C matrix highlighting the stripe seeds
stripepy plot cm 4DNFI9GMP2J8.mcool 10000 /tmp/matrix_with_seeds.png --stripepy-hdf5_
↳4DNFI9GMP2J8.10000.hdf5 --highlight-seeds

# Plot the Hi-C matrix highlighting the architectural stripes
stripepy plot cm 4DNFI9GMP2J8.mcool 10000 /tmp/matrix_with_stripes.png --stripepy-
↳hdf5 4DNFI9GMP2J8.10000.hdf5 --highlight-stripes
```

Some example plots generated with `stripepy plot` can be found in file `stripepy-plot-test-images.tar.xz` from doi.org/10.5281/zenodo.14283921.

CLI REFERENCE

For an up-to-date list of subcommands and CLI options refer to `stripepy --help`.

9.1 Subcommands

```
usage: stripepy {call,download,plot,view} ...
stripepy is designed to recognize linear patterns in contact maps (.hic, .mcool, .
↪cool) through the geometric reasoning, including topological persistence and quasi-
↪interpolation.
options:
  -h, --help            show this help message and exit
  --license             Print StripePy's license and return.
  --cite               Print StripePy's reference and return.
  -v, --version        show program's version number and exit
subcommands:
  {call,download,plot,view}
      List of available subcommands:
      stripepy works in four consecutive steps:
      • Step 1: Pre-processing
      • Step 2: Recognition of loci of interest (also called 'seeds
↪')
      • Step 3: Shape analysis (i.e., width and height estimation)
      • Step 4: Signal analysis
      download          Helper command to simplify downloading datasets that can be
↪used to test StripePy.
      plot              Generate various static plots useful to visually inspect the
↪output produced by stripepy call.
      view              Fetch stripes from the HDF5 file produced by stripepy call.
```

9.2 stripepy call

```
usage: stripepy call [-h] [-n NORMALIZATION] [-b GENOMIC_BELT]
                   [--roi {middle,start}] [-o OUTPUT_FILE]
                   [--log-file LOG_FILE] [--plot-dir PLOT_DIR]
                   [--max-width MAX_WIDTH] [--glob-pers-min GLOB_PERS_MIN]
                   [--constrain-heights] [-k K]
                   [--loc-pers-min LOC_PERS_MIN]
                   [--loc-trend-min LOC_TREND_MIN] [-f]
                   [--verbosity {debug,info,warning,error,critical}]
                   [-p NPROC] [--min-chrom-size MIN_CHROM_SIZE]
                   contact-map resolution
positional arguments:
  contact-map          Path to a .cool, .mcool, or .hic file for input.
```

(continues on next page)

(continued from previous page)

```

resolution          Resolution (in bp).
options:
-h, --help          show this help message and exit
-n, --normalization NORMALIZATION
                    Normalization to fetch (default: None).
-b, --genomic-belt GENOMIC_BELT
                    Radius of the band, centred around the diagonal, where the
↳search is restricted to (in bp, default: 50000000).
  --roi {middle,start} Criterion used to select a region from each chromosome used
↳to generate diagnostic plots (default: None).
                    Requires --plot-dir.
-o, --output-file OUTPUT_FILE
                    Path where to store the output HDF5 file.
                    When not specified, the output file will be saved in the
↳current working directory with a named based on the name of input matrix file.
  --log-file LOG_FILE Path where to store the log file.
  --plot-dir PLOT_DIR Path where to store the output plots.
                    Required when --roi is specified and ignored otherwise.
                    If the specified folder does not already exist, it will be
↳created.
  --max-width MAX_WIDTH
                    Maximum stripe width, in bp (default: 1000000).
  --glob-pers-min GLOB_PERS_MIN
                    Threshold value between 0 and 1 to filter persistence maxima
↳points and identify loci of interest, aka seeds (default: 0.04).
  --constrain-heights Use peaks in signal to constrain the stripe height (default:
↳False).
-k, --k-neighbour K k for the k-neighbour, i.e., number of bins adjacent to the
↳stripe boundaries on both sides (default: 3).
  --loc-pers-min LOC_PERS_MIN
                    Threshold value between 0 and 1 to find peaks in signal in a
↳horizontal domain while estimating the height of a stripe; when --constrain-heights
↳is set to 'False', it is not used (default: 0.33).
  --loc-trend-min LOC_TREND_MIN
                    Threshold value between 0 and 1 to estimate the height of a
↳stripe (default: 0.25); the higher this value, the shorter the stripe; it is always
↳used when --constrain-heights is set to 'False', but could be necessary also when --
↳constrain-heights is 'True' and no persistent maximum other than the global maximum
↳is found.
-f, --force          Overwrite existing file(s) (default: False).
  --verbosity {debug,info,warning,error,critical}
                    Set verbosity of output to the console (default: info).
-p, --nproc NPROC    Maximum number of parallel processes to use (default: 1).
  --min-chrom-size MIN_CHROM_SIZE
                    Minimum size, in bp, for a chromosome to be analysed
↳(default: 20000000).

```

9.3 stripepy download

```

usage: stripepy download [-h] [--assembly {hg38,mm10} | --name NAME |
                        --list-only] [--unit-test | --end2end-test]
                        [--include-private] [--max-size MAX_SIZE]
                        [-o OUTPUT_PATH] [-f]
                        [--verbosity {debug,info,warning,error,critical}]
options:

```

(continues on next page)

(continued from previous page)

```

-h, --help                show this help message and exit
--assembly {hg38,mm10}    Restrict downloads to the given reference genome assembly.
--name NAME               Name of the dataset to be downloaded.
                          When not provided, randomly select and download a dataset
↳ based on the provided CLI options (if any).
--list-only               Print the list of available datasets and return (default:
↳ False).
--unit-test               Download the test datasets required by the unit tests.
                          Files will be stored under folder test/data/
                          When specified, all other options are ignored.
                          Existing files will be overwritten.
--end2end-test            Download the test datasets required by the end2end tests.
                          Files will be stored under folder test/data/
                          When specified, all other options are ignored.
                          Existing files will be overwritten.
--include-private         Include datasets used for internal testing (default: False).
--max-size MAX_SIZE      Upper bound for the size of the files to be considered when
↳ name is not provided (default: 512.0).
-o, --output OUTPUT_PATH Path where to store the downloaded file (default: None).
-f, --force               Overwrite existing file(s) (default: False).
--verbosity {debug,info,warning,error,critical}
                          Set verbosity of output to the console (default: info).

```

9.4 stripepy plot

```

usage: stripepy plot [-h]
                    {contact-map,cm,pseudodistribution,pd,stripe-hist,hist} ...
options:
  -h, --help                show this help message and exit
plot_subcommands:
  {contact-map,cm,pseudodistribution,pd,stripe-hist,hist}
                          List of available subcommands:
  contact-map (cm)         Plot stripes and other features over the Hi-C matrix.
  pseudodistribution (pd)  Plot the pseudo-distribution over the given region of
↳ interest.
  stripe-hist (hist)       Generate and plot the histograms showing the distribution of
↳ the stripe heights and widths.

```

9.5 stripepy plot contact-map

```

usage: stripepy plot contact-map [-h] [--stripepy-hdf5 STRIPEPY_HDF5]
↳ THRESHOLD]
                                [--relative-change-threshold RELATIVE_CHANGE_]
                                [--highlight-seeds | --highlight-stripes]
                                [--ignore-stripe-heights] [--cmap CMAP]
                                [--linear-scale | --log-scale]
                                [--region REGION] [--dpi DPI] [--seed SEED]
                                [-n NORMALIZATION] [-f]
                                [--verbosity {debug,info,warning,error,critical}]
                                contact-map resolution output-name
positional arguments:

```

(continues on next page)

(continued from previous page)

```

contact-map          Path to the .cool, .mcool, or .hic file used to call stripes.
resolution           Resolution (in bp).
output-name          Path where to store the generated plot.
options:
-h, --help           show this help message and exit
--stripepy-hdf5 STRIPEPY_HDF5
                    Path to the .hdf5 generated by stripepy call.
                    Required when highlighting stripes or seeds.
--relative-change-threshold RELATIVE_CHANGE_THRESHOLD
                    Cutoff for the relative change (default: None).
                    Only used when highlighting architectural stripes.
                    The relative change is computed as the ratio between the
↪ average number of interactions found inside a stripe and the number of interactions
↪ in a neighborhood outside of the stripe.
--highlight-seeds   Highlight the stripe seeds (default: False).
--highlight-stripes Highlight the architectural stripes (default: False).
--ignore-stripe-heights
                    Ignore the stripes height (default: False).
                    Has no effect when --highlight-stripes is not specified.
--cmap CMAP          Color map used to plot Hi-C interactions (default: fruit_
↪ punch).
                    Can be any of the color maps supported by matplotlib as well
↪ as: fall, fruit_punch, blues, acidblues, and nmeth.
--linear-scale      Plot interactions in linear scale (default: False).
--log-scale         Plot interactions in log scale (default: True).
--region REGION     Genomic region to be plotted (UCSC format). When not
↪ specified, a random 2.5Mb region is plotted.
--dpi DPI           DPI of the generated plot (default: 300; ignored when the
↪ output format is a vector graphic).
--seed SEED         Seed for random number generation (default:
↪ 7606490399616306585).
-n, --normalization NORMALIZATION
                    Normalization to fetch (default: None).
-f, --force         Overwrite existing file(s) (default: False).
--verbosity {debug,info,warning,error,critical}
                    Set verbosity of output to the console (default: info).

```

9.6 stripepy plot pseudodistribution

```

usage: stripepy plot pseudodistribution [-h] [--region REGION] [--dpi DPI]
                                         [--seed SEED] [-n NORMALIZATION] [-f]
                                         [--verbosity {debug,info,warning,error,
↪ critical}]

```

```

                                         stripepy-hdf5 output-name

```

positional arguments:

```

stripepy-hdf5      Path to the .hdf5 generated by stripepy call.
output-name        Path where to store the generated plot.

```

options:

```

-h, --help         show this help message and exit
--region REGION    Genomic region to be plotted (UCSC format). When not
↪ specified, a random 2.5Mb region is plotted.
--dpi DPI          DPI of the generated plot (default: 300; ignored when the
↪ output format is a vector graphic).
--seed SEED        Seed for random number generation (default:
↪ 7606490399616306585).

```

(continues on next page)

(continued from previous page)

```
-n, --normalization NORMALIZATION
                        Normalization to fetch (default: None).
-f, --force             Overwrite existing file(s) (default: False).
--verbosity {debug,info,warning,error,critical}
                        Set verbosity of output to the console (default: info).
```

9.7 stripepy plot stripe-hist

```
usage: stripepy plot stripe-hist [-h] [--region REGION] [--dpi DPI]
                                [--seed SEED] [-n NORMALIZATION] [-f]
                                [--verbosity {debug,info,warning,error,critical}]
                                stripepy-hdf5 output-name

positional arguments:
  stripepy-hdf5        Path to the .hdf5 generated by stripepy call.
  output-name          Path where to store the generated plot.

options:
  -h, --help           show this help message and exit
  --region REGION      Genomic region to be plotted (UCSC format). When not
↳ specified, data for the entire genome is plotted.
  --dpi DPI            DPI of the generated plot (default: 300; ignored when the
↳ output format is a vector graphic).
  --seed SEED          Seed for random number generation (default:
↳ 7606490399616306585).
  -n, --normalization NORMALIZATION
                        Normalization to fetch (default: None).
  -f, --force          Overwrite existing file(s) (default: False).
  --verbosity {debug,info,warning,error,critical}
                        Set verbosity of output to the console (default: info).
```

9.8 stripepy view

```
usage: stripepy view [-h]
                    [--relative-change-threshold RELATIVE_CHANGE_THRESHOLD]
                    [--with-biodescriptors] [--with-header]
                    [--transform {None,transpose_to_lt,transpose_to_ut}]
                    [--verbosity {debug,info,warning,error,critical}]
                    h5-file

positional arguments:
  h5-file              Path to the HDF5 file generated by stripepy call.

options:
  -h, --help          show this help message and exit
  --relative-change-threshold RELATIVE_CHANGE_THRESHOLD
                        Cutoff for the relative change (default: 5.0).
                        The relative change is computed as the ratio between the
↳ average number of interactions
                        found inside a stripe and the number of interactions in a
↳ neighborhood outside of the stripe.
  --with-biodescriptors
                        Include the stripe biodescriptors in the output.
  --with-header        Include column names in the output.
  --transform {None,transpose_to_lt,transpose_to_ut}
                        Control if and how stripe coordinates should be transformed.
↳ (default: None).
```

(continues on next page)

(continued from previous page)

```
--verbosity {debug,info,warning,error,critical}
           Set verbosity of output to the console (default: info).
```

PYTHON API REFERENCE

`stripepy.data_structures.SparseMatrix`

alias of `csr_matrix` | `csc_matrix`

```
class stripepy.data_structures.Stripe(  
    seed: int,  
    top_pers: float | None,  
    horizontal_bounds: Tuple[int, int] | None = None,  
    vertical_bounds: Tuple[int, int] | None = None,  
    where: str | None = None,  
)
```

A class used to represent architectural stripes. This class takes care of validating stripe coordinates and computing several descriptive statistics.

This is how this class should be used:

- Initialize the class by providing at least the seed position
- At a later time, set the vertical and horizontal boundaries by calling `set_horizontal_bounds` and `set_vertical_bounds`
- Finally, call `compute_biodescriptors` to compute and store the descriptive statistics

The stripe properties and statistics can now be accessed through the attributes listed below.

Attributes representing the descriptive statistics return negative values to signal that it was not possible to compute the statistics for the current Stripe instance.

```
__init__(  
    seed: int,  
    top_pers: float | None,  
    horizontal_bounds: Tuple[int, int] | None = None,  
    vertical_bounds: Tuple[int, int] | None = None,  
    where: str | None = None,  
)
```

Parameters

- **seed** – the stripe seed position
- **top_pers** – the topological persistence of the seed
- **horizontal_bounds** – the horizontal bounds of the stripe
- **vertical_bounds** – the vertical bounds of the stripe
- **where** – the location of the stripe: should be “upper_triangular” or “lower_triangular”. When provided, this is used to validate the coordinates set when calling `set_horizontal_bounds()` and `set_vertical_bounds()`.

property seed: `int`

The stripe seed

property top_persistence: `float | None`

The topological persistence

property lower_triangular: `bool`

True when the stripe extends in the lower-triangular portion of the matrix

property upper_triangular: `bool`

True when the stripe extends in the upper-triangular portion of the matrix

property left_bound: `int`

The left bound of the stripe

property right_bound: `int`

The right bound of the stripe

property top_bound: `int`

The top bound of the stripe

property bottom_bound: `int`

The bottom bound of the stripe

property inner_mean: `float`

The average number of interactions within the stripe

property inner_std: `float`

The standard deviation of the number of interactions within the stripe

property five_number: `ndarray[tuple[Any, ...], dtype[float]]`

A vector of five numbers corresponding to the 0, 25, 50, 75, and 100 percentiles of the number of within-stripe interactions

property outer_lsum: `float`

The sum of interactions in the band to the left of the stripe

property outer_rsum: `float`

The sum of interactions in the band to the right of the stripe

property outer_lsize: `float`

The number of entries in the band to the left of the stripe

property outer_rsize: `float`

The number of entries in the band to the right of the stripe

property outer_lmean: `float`

The average number of interactions in the band to the left of the stripe

property outer_rmean: `float`

The average number of interactions in the band to the right of the stripe

property outer_mean: `float`

The average number of interactions in the bands to the left and right of the stripe

property rel_change: `float`

The ratio of the average number of interactions within the stripe and in the neighborhood outside of the stripe

set_horizontal_bounds(*left_bound: int, right_bound: int*)

Set the horizontal bounds for the stripe. This function raises an exception when the coordinates have already been set or when the given coordinates are incompatible with the seed position.

Parameters

- `left_bound`

- **right_bound**

set_vertical_bounds(*top_bound: int, bottom_bound: int*)

Set the vertical bounds for the stripe. This function raises an exception when the coordinates have already been set or when the given coordinates are incompatible with the seed position and/or the where location.

Parameters

- **top_bound**
- **bottom_bound**

compute_biodescriptors(
matrix: csr_matrix | csc_matrix,
window: int = 3,
)

Use the sparse matrix to compute various descriptive statistics. Statistics are stored in the current Stripe instance. This function raises an exception when it is called before the stripe bounds have been set.

Parameters

- **matrix** – the sparse matrix from which the stripe originated
- **window** – window size used to compute statistics to the left and right of the stripe

class stripepy.data_structures.ResultFile(
path: Path,
mode: str = 'r',
_create_key: object | None = None,
)

A class used to read and write StripePy results to a HDF5 file.

There are 3 main use cases:

- Open the file in read mode:

```
with ResultFile("results.hdf5") as h5:
    ...
```

- Open file in write mode:

- If all data will be written to the file before the file is closed:

```
with ResultFile.create("results.hdf5", mode="w", ...) as h5:
    h5.write_descriptors(res1)
    h5.write_descriptors(res2)
    ...
```

- If the data will be added progressively:

```
with ResultFile.create("results.hdf5", mode="a", ...) as h5:
    h5.write_descriptors(res1) # not mandatory, it is also possible to
    ↪ create the
                                # file and close it immediately
    ...
with ResultFile.append("results.hdf5") as h5:
    h5.write_descriptors(res2)
    h5.write_descriptors(res3)
    ...
with ResultFile.append("results.hdf5") as h5:
    h5.write_descriptors(res4)
    h5.finalize() # IMPORTANT!
```

(continues on next page)

(continued from previous page)

```

# Without the above line you'll get an error when
↪ trying to open
# the file in read mode

```

When opening or creating a *ResultFile* write or append mode, a context manager (e.g. with:) must be used

```

__init__(
    path: Path,
    mode: str = 'r',
    _create_key: object | None = None,
)

static create(
    path: Path,
    mode: str,
    chroms: Dict[str, int],
    resolution: int,
    normalization: str | None = None,
    assembly: str = 'unknown',
    metadata: Dict[str, Any] | None = None,
    compression_lvl: int = 9,
)

```

Create a *ResultFile* using the provided information.

```

static create_from_file(
    path: Path,
    mode: str,
    matrix_file: File,
    normalization: str | None = None,
    metadata: Dict[str, Any] | None = None,
    compression_lvl: int = 9,
)

```

Create a *ResultFile* using information from the given matrix file.

```
static append(path: Path)
```

Append to an existing *ResultFile*.

IMPORTANT: the file must have been created with *create* or *create_from_file* with mode="a"

```
property assembly: str
```

The name of the reference genome assembly used to generate the file

```
property chromosomes: Dict[str, int]
```

The chromosomes associated with the opened file

```
property creation_date: datetime
```

The file creation date

```
property format: str
```

The file format string

```
property format_url: str
```

The URL where the file format is documented

```
property format_version: int
```

The format version of the file currently opened

```
property generated_by: str
```

The name of the tool used to generate the opened file

property metadata: `Dict[str, Any]`

The metadata associated with the file

property normalization: `str | None`

The name of the normalization used to generate the data stored in the given file

property path: `Path`

The path to the opened file

property resolution: `int`

The resolution of the Hi-C matrix used to generate the file

finalize()

Finalize a file opened in append mode

__getitem__(*chrom: str*) → *Result*

get_min_persistence(*chrom: str*) → *float*

Get the minimum persistence associated with the given chromosome.

Parameters

chrom – chromosome name

Returns

the minimum persistence

get(

chrom: str | None,

field: str,

location: str,

) → *DataFrame*

Get the data associated with the given chromosome, field, and location.

Parameters

- **chrom** – chromosome name. when not provided, return data for the entire genome.
- **field** – name of the field to be fetched. Supported names:
 - pseudodistribution
 - all_minimum_points
 - persistence_of_all_minimum_points
 - all_maximum_points
 - persistence_of_all_maximum_points
 - geo_descriptors
 - bio_descriptors
- **location** – location of the attribute to be registered. Should be “LT” or “UT”

Returns

the data associated with the given chromosome, field, and location

write_descriptors(*result: Result*)

Read the descriptors from the given Result object and write them to the opened file.

Parameters

result – results to be added to the opened file

class stripepy.data_structures.**Result**(*chrom_name: str, chrom_size: int*)

A class used to represent the results generated by stripepy call.

`__init__(chrom_name: str, chrom_size: int)`

Parameters

chrom – chromosome name

property chrom: `Tuple[str, int]`

The name and length of the chromosomes to which the *Result* instance belongs to

property empty: `bool`

Check whether any stripe has been registered with the *Result* instance

property min_persistence: `float`

The minimum persistence used during computation

property roi: `Dict[str, List[int]] | None`

The region of interest associated with the *Result* instance

get(

name: str,

location: str,

) → `List[Stripe] | ndarray[int] | ndarray[float]`

Get the value associated with the given attribute name and location.

Parameters

- **name** – name of the attribute to be fetched
- **location** – location of the attribute to be fetched. Should be “LT” or “UT”

Returns

the value associated with the given name and location.

get_stripes_descriptor(

descriptor: str,

location: str,

) → `ndarray[int] | ndarray[float]`

Get the stripe descriptor for the given location.

Parameters

- **descriptor** – name of the descriptor to be fetched
- **location** – location of the attribute to be fetched. Should be “LT” or “UT”

Returns

the value associated with the given descriptor and location.

get_stripe_bio_descriptors(*location: str*) → `DataFrame`

Fetch all biological descriptors at once.

Parameters

location – location of the attribute to be fetched. Should be “LT” or “UT”

Returns

the table with the biological descriptors associated with the *Result* instance

get_stripe_geo_descriptors(*location: str*) → `DataFrame`

Fetch all geometric descriptors at once.

Parameters

location – location of the attribute to be fetched. Should be “LT” or “UT”

Returns

the table with the geometric descriptors associated with the *Result* instance

TELEMETRY

Starting with version v1.1.1 of StripePy, we introduced support for telemetry collection.

This page outlines what information we are collecting and why. Furthermore, we provide instructions on how telemetry collection can be disabled.

11.1 What information is being collected

`stripepy` is instrumented to collect general information about `stripepy` itself and the system where it is being run.

We do not collect any sensitive information that could be used to identify our users, the machine where `stripepy` is being run, or the datasets processed by `stripepy`.

This is the data we are collecting:

- Information on how `stripepy` was installed (i.e., the package version and third-party dependency versions).
- Information on the system where `stripepy` is being run (i.e., operating system, processor architecture, and Python version).
- How `stripepy` is being invoked (i.e., the subcommand, input file format and parameters).
- Information about `stripepy` execution (i.e., when it was launched, how long the command took to finish, and whether the command terminated with an error).

The following table shows an example of the telemetry collected when running `stripepy call ENCFF993FGR.hic 10000 -p 8`:

Table 1: Telemetry information collected when running `stripepy call`

Field	Value
<code>dependency.h5py.version</code>	3.14.0
<code>dependency.hictkpy.version</code>	1.3.0
<code>dependency.numpy.version</code>	2.3.1
<code>dependency.packaging.version</code>	25.0
<code>dependency.pandas.version</code>	2.3.1
<code>dependency.scipy.version</code>	1.16.0
<code>dependency.structlog.version</code>	25.4.0
<code>duration_ms</code>	103074.812875
<code>host.arch</code>	x86_64
<code>library.name</code>	stripepy
<code>meta.signal_type</code>	trace
<code>name</code>	call
<code>os.type</code>	linux
<code>os.version</code>	6.11.0-1015-azure
<code>params.constrain_heights</code>	false
<code>params.contact_map_format</code>	mcool

continues on next page

Table 1 – continued from previous page

Field	Value
params.contact_map_raw_interactions	true
params.contact_map_resolution	20000
params.genomic_belt	5000000
params.glob_pers_min	0.04
params.k	3
params.loc_pers_min	0.33
params.loc_trend_min	0.25
params.max_width	100000
params.nproc	4
process.runtime.description	GCC 12.2.0
process.runtime.name	CPython
process.runtime.version	3.13.5
Sample Rate	1
service.name	stripepy
service.version	1.1.1.dev73+g2e13fec
span.kind	internal
span.num_events	0
span.num_links	0
status_code	1
telemetry.sdk.language	python
telemetry.sdk.name	opentelemetry
telemetry.sdk.version	1.34.1
trace.span_id	4b6f5534c8aec420
trace.trace_id	30b4804d781557f552d15dec8270fca8
type	internal

11.2 Why are we collecting this information?

There are two main motivations behind our decision to start collecting telemetry data:

1. To get an idea of how big our user base is: this will help us, among other things, to secure funding to maintain `stripepy` in the future.
2. To better understand which of the functionalities offered by `stripepy` are most used by our users: we intend to use this information to help us decide which features we should focus our development efforts on.

11.3 How is telemetry information processed and stored

Telemetry is sent to an OpenTelemetry collector running on a virtual server hosted on the Norwegian Research and Education Cloud (NREC).

The virtual server and collector are managed by us, and traffic between `stripepy` and the collector is encrypted.

The collector processes incoming data continuously and forwards it to a dashboard for data analytics and a backup solution (both services are hosted in Europe). Communication between the collector, dashboard, and backup site is also encrypted. Data stored by the dashboard and backup site is encrypted at rest.

The analytics dashboard keeps telemetry data for up to 60 days, while the backup site is currently set up to store telemetry data indefinitely (although this may change in the future).

11.4 How to disable telemetry collection

To disable telemetry collection, simply define the `STRIPEPY_NO_TELEMETRY` environment variable before launching `stripepy` (e.g., `STRIPEPY_NO_TELEMETRY=1 stripepy download`)

11.5 Where can I find the code used for telemetry collection?

All code concerning telemetry collection is defined in file `src/stripepy/cli/telemetry.py`.

PYTHON MODULE INDEX

S

[stripepy](#), 25

Symbols

`__getitem__()` (*stripepy.data_structures.ResultFile* method), 29

`__init__()` (*stripepy.data_structures.Result* method), 29

`__init__()` (*stripepy.data_structures.ResultFile* method), 28

`__init__()` (*stripepy.data_structures.Stripe* method), 25

A

`append()` (*stripepy.data_structures.ResultFile* static method), 28

`assembly` (*stripepy.data_structures.ResultFile* property), 28

B

`bottom_bound` (*stripepy.data_structures.Stripe* property), 26

C

`chrom` (*stripepy.data_structures.Result* property), 30

`chromosomes` (*stripepy.data_structures.ResultFile* property), 28

`compute_biodescriptors()` (*stripepy.data_structures.Stripe* method), 27

`create()` (*stripepy.data_structures.ResultFile* static method), 28

`create_from_file()` (*stripepy.data_structures.ResultFile* static method), 28

`creation_date` (*stripepy.data_structures.ResultFile* property), 28

E

`empty` (*stripepy.data_structures.Result* property), 30

F

`finalize()` (*stripepy.data_structures.ResultFile* method), 29

`five_number` (*stripepy.data_structures.Stripe* property), 26

`format` (*stripepy.data_structures.ResultFile* property), 28

`format_url` (*stripepy.data_structures.ResultFile* property), 28

`format_version` (*stripepy.data_structures.ResultFile* property), 28

G

`generated_by` (*stripepy.data_structures.ResultFile* property), 28

`get()` (*stripepy.data_structures.Result* method), 30

`get()` (*stripepy.data_structures.ResultFile* method), 29

`get_min_persistence()` (*stripepy.data_structures.ResultFile* method), 29

`get_stripe_bio_descriptors()` (*stripepy.data_structures.Result* method), 30

`get_stripe_geo_descriptors()` (*stripepy.data_structures.Result* method), 30

`get_stripes_descriptor()` (*stripepy.data_structures.Result* method), 30

I

`inner_mean` (*stripepy.data_structures.Stripe* property), 26

`inner_std` (*stripepy.data_structures.Stripe* property), 26

L

`left_bound` (*stripepy.data_structures.Stripe* property), 26

`lower_triangular` (*stripepy.data_structures.Stripe* property), 26

M

`metadata` (*stripepy.data_structures.ResultFile* property), 28

`min_persistence` (*stripepy.data_structures.Result* property), 30

`module`
stripepy, 25

N

`normalization` (*stripepy.data_structures.ResultFile* property), 29

O

`outer_lmean` (*stripepy.data_structures.Stripe* property), 26

`outer_lsize` (*stripepy.data_structures.Stripe* property), 26

`outer_lsum` (*stripepy.data_structures.Stripe* property), 26

`outer_mean` (*stripepy.data_structures.Stripe* property), 26

`outer_rmean` (*stripepy.data_structures.Stripe* property), 26

`outer_rsize` (*stripepy.data_structures.Stripe* property), 26

`outer_rsum` (*stripepy.data_structures.Stripe* property), 26

P

`path` (*stripepy.data_structures.ResultFile* property), 29

R

`rel_change` (*stripepy.data_structures.Stripe* property), 26

`resolution` (*stripepy.data_structures.ResultFile* property), 29

`Result` (class in *stripepy.data_structures*), 29

`ResultFile` (class in *stripepy.data_structures*), 27

`right_bound` (*stripepy.data_structures.Stripe* property), 26

`roi` (*stripepy.data_structures.Result* property), 30

S

`seed` (*stripepy.data_structures.Stripe* property), 25

`set_horizontal_bounds()`
(*stripepy.data_structures.Stripe* method), 26

`set_vertical_bounds()`
(*stripepy.data_structures.Stripe* method), 27

`SparseMatrix` (in module *stripepy.data_structures*), 25

`Stripe` (class in *stripepy.data_structures*), 25

`stripepy`
module, 25

T

`top_bound` (*stripepy.data_structures.Stripe* property), 26

`top_persistence` (*stripepy.data_structures.Stripe* property), 25

U

`upper_triangular` (*stripepy.data_structures.Stripe* property), 26

W

`write_descriptors()`
(*stripepy.data_structures.ResultFile* method), 29